

**Tapco**™  
integrated  
tool systems


# Tapco POWER-SHEAR 2000-3000

The Tapco Power Shear is electrically powered and controlled to achieve effortless cutting of a range of materials. The machines are available in a 2 metre, 2.5 metre and 3 metre models.

Model Shown: POWER-SHEAR 2500/2R




Model Shown: POWER-SHEAR 2000/2

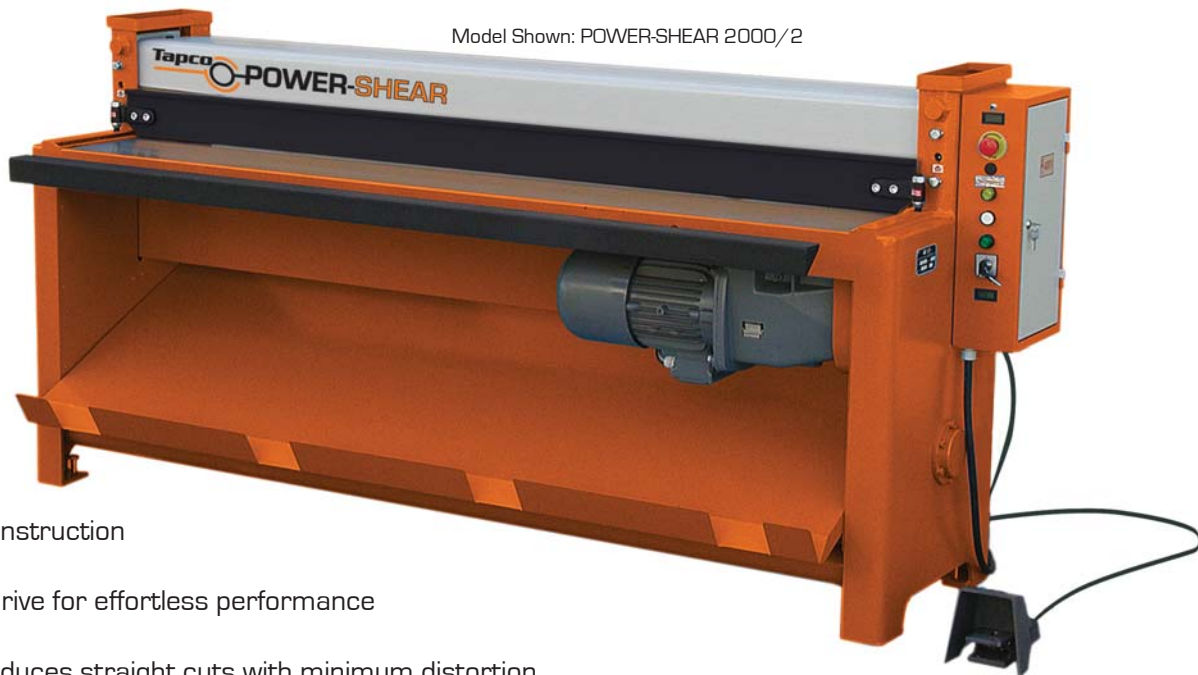

## Key Features

- All steel fabricated construction
- Electrically powered drive for effortless performance
- Low cutting angle produces straight cuts with minimum distortion
- Modern design ensures trouble free operation
- Designed and developed for speed, accuracy and reliability
- Capable of shearing a wide range of materials
- Meets all CE standards
- Front/rear retrieval available depending on model
- Rack and Pinion Back Gauge available as standard

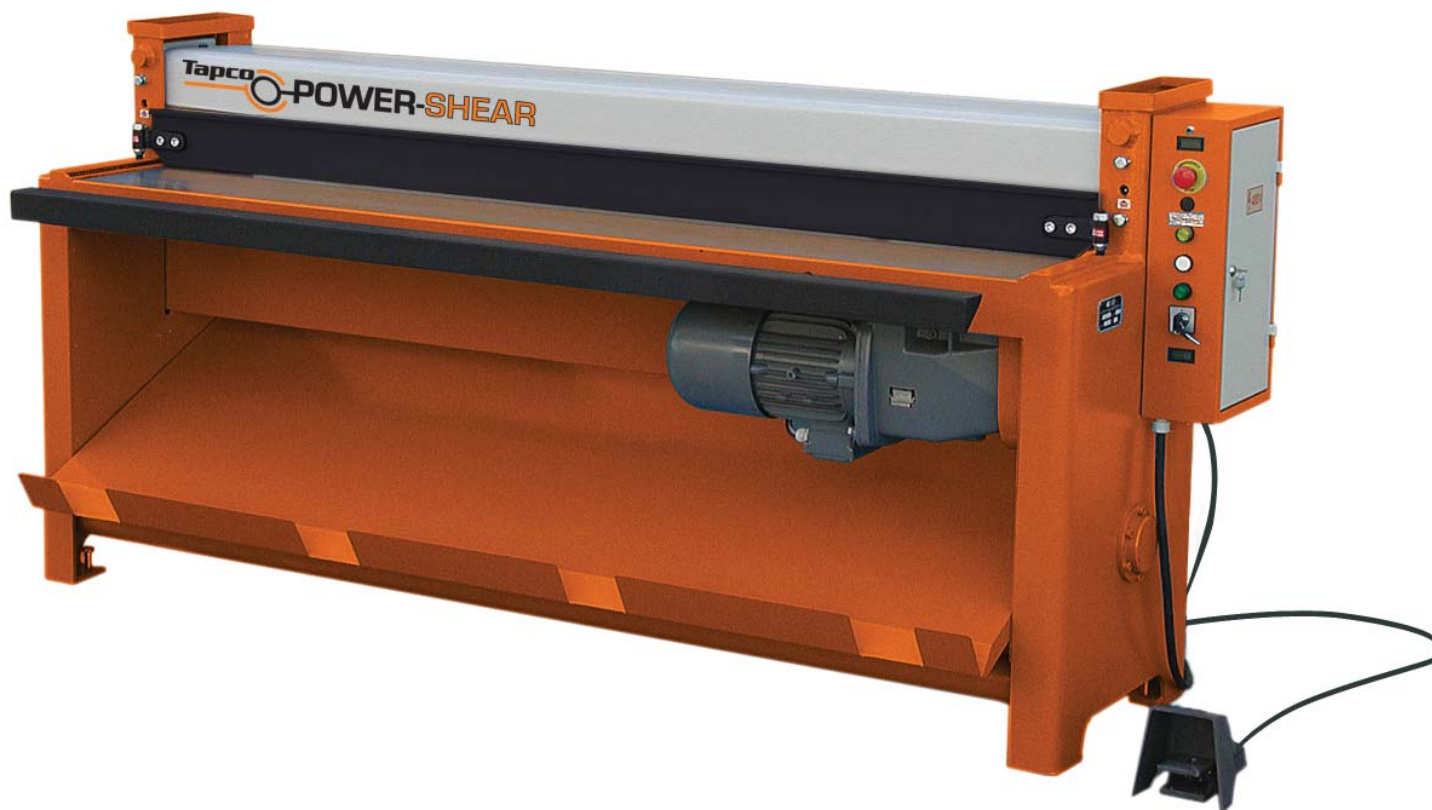

## Specifications

Model	2000/2F*	2500/2R*	3000/1.25F	3000/1.6R
Working Length	2100mm	2540mm	3040mm	3048mm
<b>BEND CAPACITY</b>	Mild Steel	2mm	1.25mm	1.6mm
	Stainless Steel	1.2mm	0.6mm	0.8mm
	Aluminum	3mm	1.5mm	2.5mm
	Copper	2.5mm	2mm	2mm
	Zinc	3mm	1.5mm	1.2mm
	Motor	4Kw	5.5Kw	4Kw
Back Gauge Range - Rack and Pinion	0 - 500mm (0-750mm optional)	0 - 600mm	0 - 500mm (0-750mm optional)	0 - 600mm
Back Gauge Range - Power	N/A	0 - 850mm	N/A	0 - 860mm
Front Gauge Range	N/A	100 - 1030mm	N/A	100 - 1030mm
Overall Dimensions including gauges & rear guard LxWxH (mm)	2500 x 1250 x 1120	3058 x 748 x 1319	3400 x 1250 x 1120	3480 x 2400 x 1250
Packaging Sizes LxWxH (mm)	2400 x 900 x 1120	3427 x 898 x 1569	3400 x 900 x 1120	3700 x 2620 x 1370
Nett Weight	1050kg	2150kg	1420kg	2450kg
Gross Weight	1080kg	2380kg	1450kg	2650kg

\*F & R REFER TO FRONT AND REAR RETRIEVAL OF MATERIAL



**MilTyr - Avancerade Byggprodukter  
Tyresö**

**tel: 08-7700935**  
**e-post: info@miltyr.se**  
**www.miltyr.se**