


## OKALUX+ Light Diffusing Insulating Glass

The challenge for OKALUX+ Light Diffusing Insulating Glass: to make daylight useful. With the use of a translucent light diffusing capillary slab both sides covered with additional glass fibre tissue inserts in the cavity between panes, OKALUX+ achieves

- optimum, uniform light transmittance into the room, irrespective of irradiation conditions
- light transmission and total solar energy transmittance as required
- good colour rendering
- very good heat insulation
- UV protection as required
- sound insulation as required
- vision protection and glare protection
- slim glass structure, low weight
- bird friendly glazing

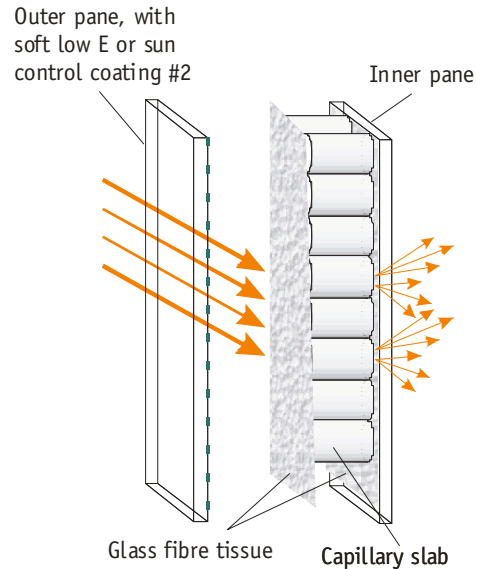

### Physical properties

#### Thermal insulation


The capillaries reduce the heat transfer in the cavity between panes in terms of convection and heat radiation.

The  $U_g$  value for the various versions is dependent, among other things, on:

- the functional coating on surface #2
- the gas filling in the cavity between panes (Air/Argon/Krypton)

The  $U_g$  value of insulating glass in accordance with DIN EN 673, DIN EN 674 always relates to vertical installation. If the insulating glass is at an angle, e.g. as in roof glazing, the  $U_g$  value increases, because the rising convection level in the cavity between panes increases. Insulating glass with a standard value of  $U_g = 1.1 \text{ W/(m}^2\text{K)}$  has an actual value of approx.  $1.7 \text{ W/(m}^2\text{K)}$  if used for horizontal roof glazing.

The capillary slab in the cavity between panes prevents convection, which means that the  $U_g$  value of OKALUX+ is nearly constant whatever the installation position.

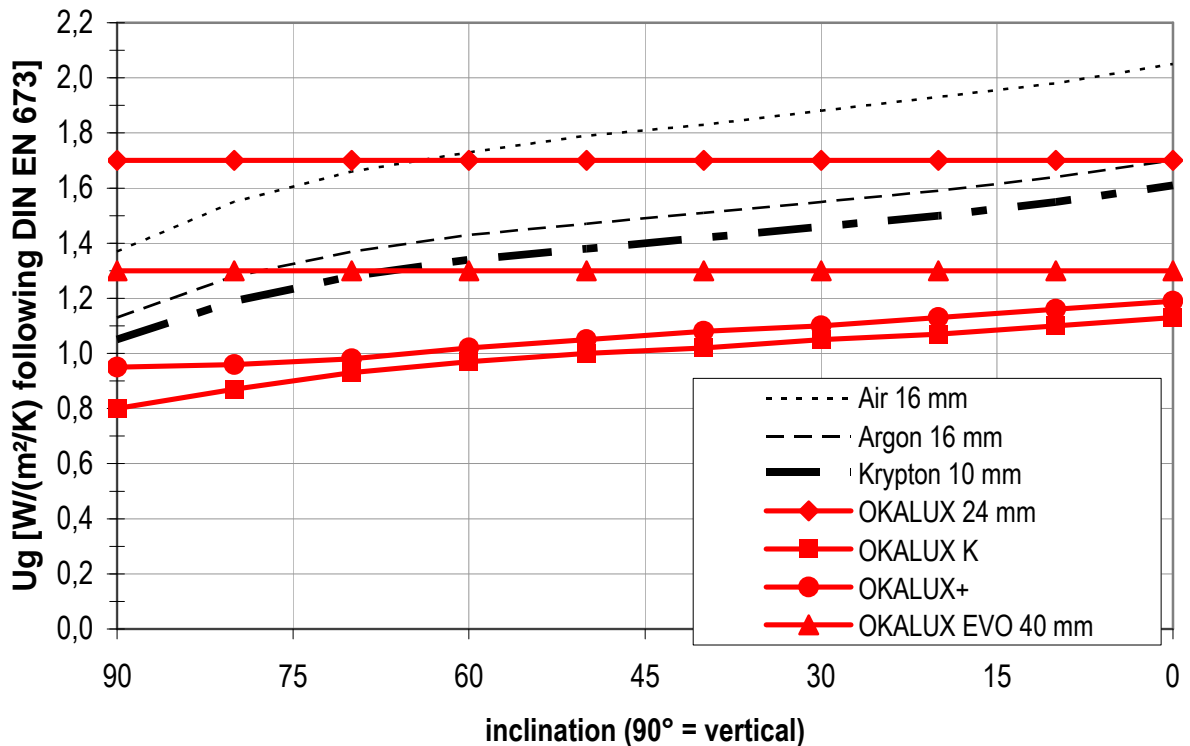

## Sound insulation

Capillary slabs decouple the panes of the insulating glazing and provide improved sound insulation.

## Spectral properties

The special light diffusing properties of the OKAPANE insert provide an optimized, uniform distribution of light in the room, regardless of irradiation conditions.

g value and light transmission depend on:

- the design of the light-diffusive inserts
- The functional coating on surface #2

A low-e coating or a combined sun-control and low-e coating at position 2 changes the colour appearance when viewed from outside.

The g value and the light transmission are dependent on the make-up of the light diffusing inserts. Other g values and light transmission values can be provided on request with the use of special make-ups.

## UV protection

Very low UV transmission possible on request.

## Technical values of standard types

The following details apply to glass make-ups with a 6 mm outer pane and a 4 mm inner pane.

OKALUX+ Type	T <sub>v</sub> direct %	T <sub>v</sub> diffuse %	TSET %	U <sub>g</sub> [W/(m²K)] / U <sub>g</sub> [Btu/(hr ft² °F)] 8 mm cavity		
				Krypton	Argon	Air
37/31	37	29	31	0.9 / 0.16	1.3 / 0.23	1.5 / 0.26
33/21	33	25	21	0.9 / 0.16	1.3 / 0.23	1.5 / 0.26
29/19	29	22	19	0.9 / 0.16	1.3 / 0.23	1.5 / 0.26
24/16	24	18	16	0.9 / 0.16	1.3 / 0.23	1.5 / 0.26
19/13	19	15	13	0.9 / 0.16	1.3 / 0.23	1.5 / 0.26

Legend and related values:

	unit	standard	technical term
U <sub>g</sub>	W/m²K	DIN EN 673 DIN EN 674	Thermal transmittance
TSET	%	DIN EN 410	Total solar energy transmittance or solar heat gain coefficient
T <sub>v</sub>	%	DIN EN 410	Light transmission (direct/hemispheric resp. diffuse/hemispheric)
R <sub>w</sub>	dB	DIN EN 20140	Sound reduction coefficient
F <sub>c</sub>	%	DIN 4108	Reduction factor of a solar control system, F <sub>c</sub> =TSET/TSET <sub>reference</sub>
SC	%	GANA Manual	Shading coefficient, SC=TSET/0.86

The above data are approximate data. They are based on measurements of approved test institutes and calculations derived from these measurements. Values determined on a project-specific basis may vary from the above values.

Direct transmission relates to direct incidence of light, generally vertical (model situation for direct sun-light). Diffuse transmission applies to homogeneous, diffuse incidence of light from the outer hemisphere (model situation for an overcast sky).

The specified values may change as a result of technical developments. No guarantee is therefore given for their correctness.

## Make-up


What makes OKALUX+ light diffusing insulating glass so special is the capillary slab inserted in the cavity between the panes. The glass type and thickness vary according to static requirements and design requirements.

### Standard make-up:

- Outer pane with functional coating
- Outer cavity between panes 8 mm with heat glass filling
- additional glass fibre tissues
- Capillary slab 8 - 24 mm
- additional glass fibre tissues
- Inner pane

Variations in the density of the capillary slab and the diameters of the capillaries may be visible, as can joints which are necessary for production reasons. Under certain light conditions it may also be possi-

ble that fine lines, also the result of the production process, can be seen within the capillary slab. The physical characteristics of OKALUX+ are not adversely affected by the above.

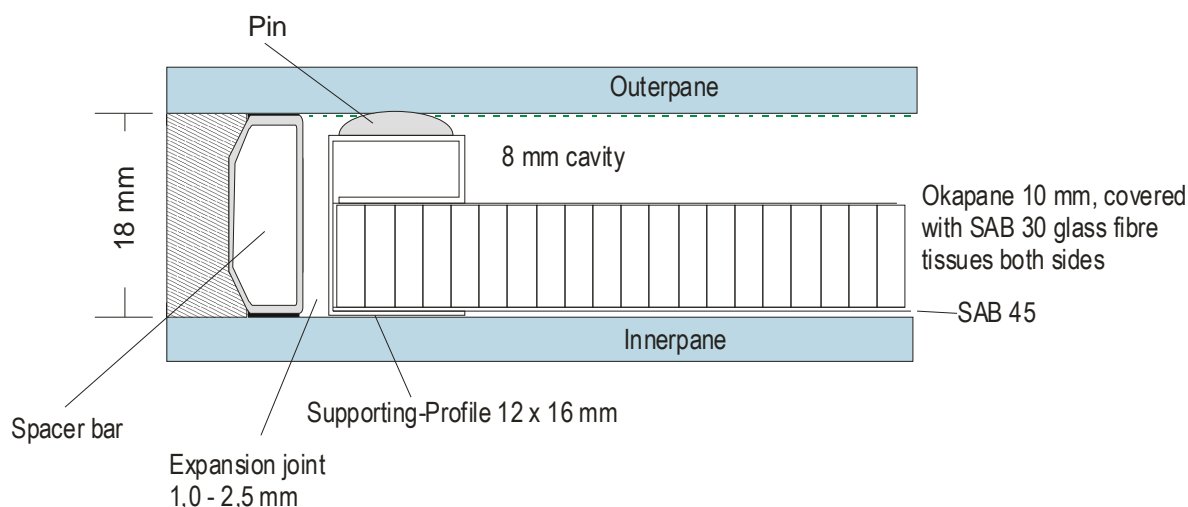

## Dimensions

max. dimensions – parallel to the holding profiles	4000 mm
max. dimensions – vertical to the holding profiles	1230 mm
min. dimensions	300 mm x 300 mm

Due to tolerance justification and different thermal expansions factors the inlay may be trimmed back at the edge by up to 2.0 mm. Therefore a gap may become visible between the inlay and the spacer bar. For this reason the glazing channel in the rebate must be at least 15 mm. If the edge sealant is increased, a larger cover may be necessary. In the case of a frameless glazing system, it is recommended that the edge seal is covered by a screen print.

## Planning instructions

Builder-owners and architects must be able to technically assess the effect of glazing in daylight terms. Okalux offers such calculations as a voluntary extra service without obligation. The daylight-relevant properties of the room to be examined must be known; in particular, these are:

- room geometry, window dimensions
- approximate degree of reflection of the surfaces forming the room boundaries

The so-called daylight quotient (D) in accordance with DIN 5034, Part 3, is relevant for the evaluation of the ambient daylight. This gives the ratio between the horizontal luminous intensity indoors and out of doors, under a completely overcast sky. This value can be calculated for different glazing variants using the existing simulation tools. The customer can thus assess the light-directing effects of special products, in comparison with normal glazing as well. In addition to the assessment in accordance with DIN, virtual images can visualise the light distribution in the rooms.

## **Installation instructions**

OKALUX+ light diffusing insulating glass is used for glazing like normal insulating glass.

For instructions and recommendations for the installation of our insulating glazing, please refer to our information and instructions for customers contained in "Delivery of OKALUX Glass Products" and "General Information on Glazing".